

Makita[®]

50-650°C Variable Heat Gun

HG6530V



Product Objectives

- Designed for stripping paint, soldering pipes, shrinking PVC, welding and bending plastic as well as general drying and thawing purposes
- Develop a newly designed heat gun with 3 stage air flow, variable temperate settings & LCD display
- The HG6530V replaces the HG6020



Product Overview

Compatible with various accessories

Self standing design

LCD display

Temperature adjustment

Compact and light weight

3 stage slide switch



Product Specification Sheet



- **Variable temperature** – push button temperature control (50-650°C) by 10°C increments for precise control over a variety of applications
- **LCD display** – shows the current temperature produced by the Heat Gun
- **Compatible with various accessories** – ability to perform a wide range of tasks such as stripping paint, soldering pipes and shrinking PVC due to different accessories available (see page 10)
- **Self standing design** – supports gun in up position for operator convenience during application and nozzle changes
- **3 stage slide switch** – easy to operate slide switch with 3 settings (low / cooling / high) for greater versatility

Air temperature	50 - 650°C
Air volume	Stage 1: 500L/min Stage 2: 280L/min Stage 3: 550L/min
Continuous rating input	2,000W
Overall length	257mm
Net weight	0.72kg
Power supply cord	2.0m

Advantages

Precision



Push button temperature control (50-650°C) with increments of 10°C

Control




Slide switch sets 3 air flow settings (low, cooling, high) for greater control

Convenience



Self standing design for comfortable use

Versatile

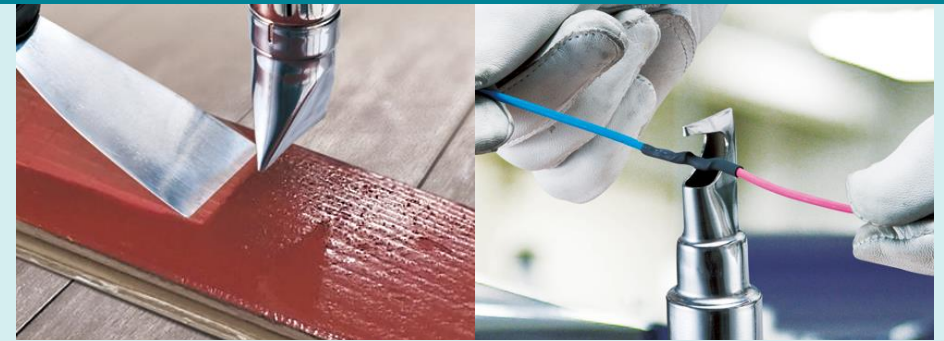





Various optional accessories available for a wide variety of tasks

Product Replacement

	HG6020 - Discontinued	HG6530V
		
Air temperature	50 - 600°C	50 - 650°C
Air volume	150-500L/min	Stage 1: 500L/min Stage 2: 280L/min Stage 3: 550L/min
Continuous rating input	2,000W	2,000W
Overall length	263mm	257mm
Net weight	0.85kg	0.72kg
Power supply cord	2.0m	2.0m

Our Range

	HG5030K	HG6020KIT	HG6530V	HG6500
				
Air temperature	Hi: 500°C Lo: 350°C	50-600°C	50-650°C	70 - 650°C
Air volume	Hi: 500L/min Lo: 300L/min	150-500L/min	Stage 1: 500L/min Stage 2: 280L/min Stage 3: 550L/min	Hi: 550L/min Lo: 280L/min
Continuous rating input	1,600W	2,000W	2,000W	2,000W
Overall length	233mm	263mm	257mm	262mm
Net weight	0.56kg	0.85kg	0.72kg	0.92kg
Power supply cord	2.0m	2.0m	2.0m	2.0m
Includes	Case	Reflector Nozzle Large (110730A) Reflector Nozzle 10mm (110746A) Reduction Nozzle 10mm (110706A) Surface Nozzle 75mm (110702A) Plastic Welding Nozzle (110720A) 2 Packs Welding Rods (110731A) (110742A) Case	Tool Only	Glass Protection Nozzle (P-33679) Surface Nozzle(110702A) Reflector Nozzle (110746A) Reflector Nozzle(P-33700) Scraper Scraper Set







Accessories



Standard Accessories

	N/A	N/A
--	-----	-----

Optional Accessories

	PR00000028	Glass protection nozzle
	PR00000029	Wide slot nozzle
	PR00000030	Reflector nozzle
	PR00000031	Reduction nozzle
	PR00000032	Overlap welding nozzle
	PR00000033	Solder sleeves reflector
	PR00000034	Welding nozzle
	PR00000035	Pressure roller
	PR00000036 PR00000037 PR00000038	ABS – Welding rods HDPE – Welding rods PP – Welding rods
	PR00000039	Speed welding nozzle
	PR00000040 PR00000041 PR00000042	Scrapper